


Gold Cone X-Flo Filter

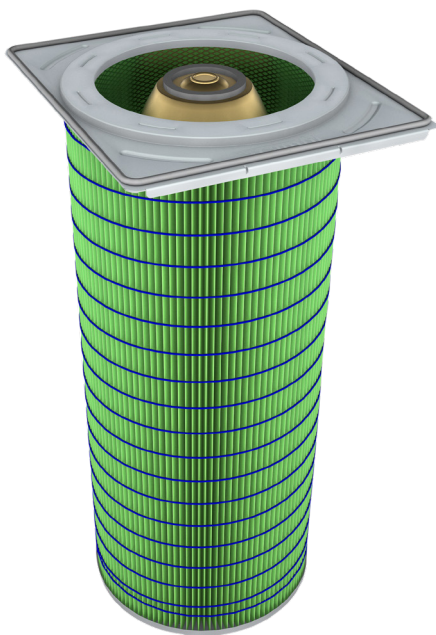

Advantages

- Low pressure drop
- Extended filter life
- Most downward facing media available
- Filter for industrial dust collectors

Application: Air Pollution Control filter cartridge for industrial processes

Structure: Galvanneal end caps and internal support


Gasket: Foam In Place Polyurethane or Synthetic Rubber

Sealant: Polyurethane

Temperature: 71° C /160° F (HemiPleat) | 93° C / 200° F (DuraPleat)

Weight: 36 Lbs (Typical for both Hemipleat and Durapleat)

Size: 19" x 22" x 41" (shipping box size, Typical)

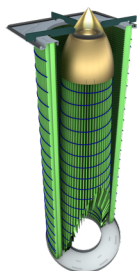

HemiPleat

Part Number	Description	Media Type	Filter Area	ASHRAE 52.2 Initial Efficiency	ISO 16890 Efficiency
375375001	FLTR-GCX-GR-375	HemiPleat Green	375 ft ² / 35 m ²	MERV 10	ePM10 65%*
375375002	FLTR-GCX-FR-375	HemiPleat Flame Retardant	375 ft ² / 35 m ²	MERV 10	ePM10 65%*
375375008	FLTR-GCX-XS-375	HemiPleat eXtreme Synthetic	375 ft ² / 35 m ²	MERV 15	ePM1 90%*
375375009	FLTR-GCX-HG-375	HemiPleat High Efficiency	375 ft ² / 35 m ²	MERV 16	ePM2.5 70%*
375375010	FLTR-GCX-HF-375	HemiPleat High Efficiency FR	375 ft ² / 35 m ²	MERV 16	ePM2.5 70%*
375375011	FLTR-GCX-HFC-375	HemiPleat High Efficiency FR Carbon	375 ft ² / 35 m ²	MERV 16	ePM2.5 70%*
375375012	FLTR-GCX-FC-375	HemiPleat FR Carbon	375 ft ² / 35 m ²	MERV 10	ePM10 70%
375375014	FLTR-GCX-XG-375	HemiPleat eXtreme Green	375 ft ² / 35 m ²	MERV 15	ePM1 90%
375375015	FLTR-GCX-XFC-375	HemiPleat eXtreme FR Carbon	375 ft ² / 35 m ²	MERV 15	ePM1 90%
375375016	FLTR-GCX-XF-375	HemiPleat eXtreme Flame Retardant	375 ft ² / 35 m ²	MERV 15	ePM1 90%*
375375017	FLTR-GCX-FRPT	HemiPleat FR PTFE	375 ft ² / 35 m ²	MERV 16	E11**

DuraPleat

Part Number	Description	Media Type	Filter Area	ASHRAE 52.2 Efficiency	ISO 16890 Efficiency
275275001	FLTR-GCX-DPS-275	DuraPleat Standard	275 ft ² / 25 m ²	MERV 11	ePM10 70%*
275275002	FLTR-GCX-DPA-275	DuraPleat Aluminized	275 ft ² / 25 m ²	MERV 11	ePM10 70%*
275275003	FLTR-GCX-DPO-275	DuraPleat Hydro Oleophobic	275 ft ² / 25 m ²	MERV 10	ePM10 65%*
275275004	FLTR-GCX-DPT-275	DuraPleat PTFE	275 ft ² / 25 m ²	MERV 16	E12**
275275005	FLTR-GCX-DPTC-275	DuraPleat PTFE Conductive	275 ft ² / 25 m ²	MERV 16	E12**

* approximate or estimated values
** EN 1822 rating

As part of our program for continuous improvement, Camfil reserves the right to change specifications without notice.

© Camfil APC / Data Sheet / Gold Cone X-Flo Data Sheet V2 / 12-04-2020-20213

